

12
P| said actuator means having a manually operated element being accessible from the outside of said receptor body,

P| a pair of locking elements mounted in said receptor body in operative relationship to said actuator means at a position between the spaced prongs for selectively engaging the punched holes of the male plug locking the prongs of the male plug to said receptor body, said pair of locking elements being a pair of balls,

cont.
P| said actuator means being movable to a first position for permitting insertion and removal of the prongs relative to said locking elements,

P| said actuator means being movable to a second position in said receptor for urging said pair of locking elements in opposite directions into locking contact with the prongs of the male plug, and

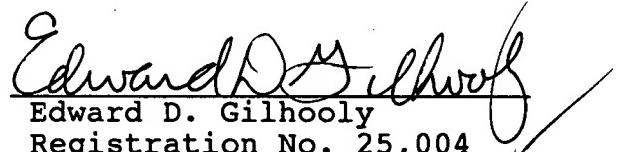
P| said actuator means includes an elongated shaft movable in said receptor body and being in operative contact with said balls, said shaft having a reduced width aligned with said balls in said first position to permit disengagement of said balls.

N
P
N
K

Remarks

By this amendment rejected Claims 1 and 10 have been cancelled in response to advisory action dated June 23, 1993. Claims 2-9 are hereby separately presented and are in condition for allowance. A Notice of Allowance solicited.

Respectfully submitted,


Edward D. Gilhooly
Registration No. 25,004
Attorney for Applicant

Edward D. Gilhooly
EDWARD D. GILHOLY, LTD.
53 W. Jackson Blvd.
Suite 1516
Chicago, IL 60604
(312) 294-0350